

## Chemical-resistant AKIMist® "E" TN



(Available only with nozzle type 03C)

Titanium is applied to the liquid contact parts, for spraying of chemical solution.

Note: This product is sold without pipe connection kit.

### Applications

- Disinfection, sterilization in food factories, hospitals/ pharmaceutical plants
- Disinfection, deodorization in egg farms, livestock barns

### Easy DIY Kit

## Dry Fog Humidifier Kit


### AE-KIT

All the components for an efficient humidification system in one DIY kit. Just supply the electricity and compressed air.

- You can choose the contents of AE-KIT freely to suit your factory size and layout.
- Includes piping and connectors for tap water and air, you can install them easily, and keep optimal humidity. (AKIMist® "E" is installed on a wall.)
- One AE-KIT is good for spaces of up to 800 m<sup>3</sup>. Please contact us for an inquiry sheet.

Includes:

Nozzle unit (AKIMist® "E"), Control unit, Water (filter) unit, and Piping unit

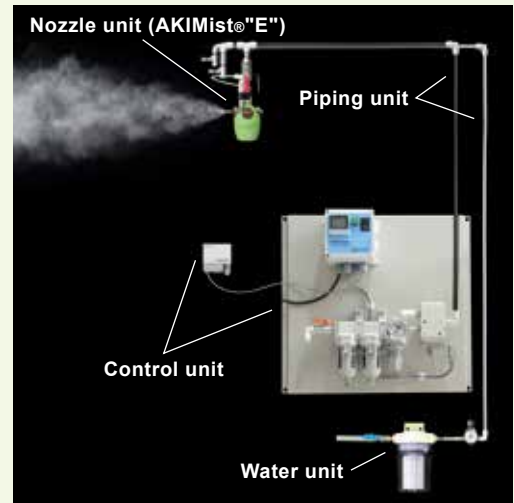

### No piping work!

## Portable Dry Fog Humidifier Set

### AE-T set

No piping work necessary.

Easy, convenient humidification for immediate usage in any place with an air supply.

- AKIMist® "E" portable humidifier set with a stand unit and water pressure tank. No installation work required.
- Easy automatic control with a humidity controller (optional).
- Ideal for spot humidification around machinery and use in a small space up to 100 m<sup>3</sup>.

Includes:

AKIMist® "E", Stand with wheels, Telescopic pole, Water tank, Gauge-mounted pressure regulators, and Mounting unit

**Option** Compact humidity controller set

### Specifications

Tank capacity	Material	Max. pressure	Mass	Pole height
18 L (4.8 gal)	Stainless steel 304 etc.	0.7 MPa (100 psi)	12.4 kg (loaded: 30.4 kg) 28 lb (loaded: 67 lb)	Min. 1,000– Max. 2,380 mm

Note: Safety valve is set at 0.4 MPa.

